


Profil	PJ	PK	PL	PM	PH
e =	2,34	3,56	4,7	9,4	1,6
h =	3,50	5,50	7,0	13,0	3,0

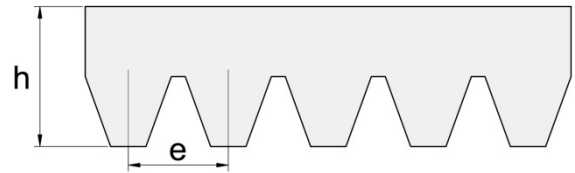

Alle Keilrippenriemen sind nach Wirklänge Lw angegeben

PJ		PK		PL		PM		PH	
Lw		Lw		Lw		Lw		Lw	
330	1600	630	2330	955	3086	2286	1895		
356	1651	650	2490	991	3124	2388	1930		
381	1663	675	2555	1041	3226	2515	1956		
406	1702	700		1074	3289	2693	1981		
432	1753	730		1150	3327	2832	1992		
457	1778	755		1168	3493	2921			
483	1854	775		1194	3696	3010			
508	1930	800		1219	4051	3124			
559	1956	830		1270	4191	3327			
584	1981	845		1295	4470	3531			
610	1994	870		1321	4623	3734			
660	2019	885		1334	5029	4089			
686	2083	925		1372	5385	4191			
711	2210	950		1397	6096	4470			
723	2337	970		1422		4648			
737	2489	1000		1435		5029			
762		1015		1473		5410			
813		1035		1499		6121			
838		1060		1562		6883			
864		1080		1613		7646			
889		1145		1651		8408			
914		1165		1664		9169			
955		1200		1715		9931			
965		1230		1765		10693			
990		1300		1803		12217			
1016		1335		1842		13741			
1056		1385		1943		15266			
1092		1420		1956		16784			
1143		1460		1981					
1150		1490		2019					
1168		1520		2070					
1194		1555		2096					
1200		1610		2134					
1219		1655		2197					
1245		1700		2235					
1270		1725		2324					
1287		1755		2362					
1295		1800		2477					
1321		1860		2515					
1346		1885		2565					
1372		1900		2705					
1397		1980		2743					
1422		2050		2845					
1461		2080		2895					
1473		2145		2921					
1549		2235		2997					