




Kupplungsstern aus Polyurethan (Farbe gelb) – 92 Shore A

Artikel- Nummer	Größe	Außen DA	Innen DI	Breite ZB	Anzahl "Zähne" Z	Lges	Dreh- zahl n max. [1/min.]	Drehmoment [Nm]			Gewicht [kg]
								TK-N	TK-M	TK-W	
								Nenn	max.	Wechsel	
ZKS14/92	14	30	10	10	4	35	19.000	7,5	15	2	0,005
ZKS19/92	19	40	18	12	6	66	14.000	10	20	3	0,006
ZKS24/92	24	55	27	14	8	78	10.600	35	70	9	0,015
ZKS28/92	28	65	30	15	8	90	8.500	95	190	25	0,027
ZKS38/92	38	80	38	18	8	114	7.100	190	380	49	0,045
ZKS42/92	42	95	46	20	8	126	6.000	265	530	69	0,067
ZKS48/92	48	105	51	21	8	140	5.600	310	620	81	0,088
ZKS55/92	55	120	60	22	8	160	4.750	410	820	107	0,120
ZKS65/92	65	135	68	26	8	185	4.250	625	1.250	163	0,174
ZKS75/92	75	160	80	30	10	210	3.550	1.280	2.560	333	0,328
ZKS90/92	90	200	100	34	10	245	2.800	2.400	4.800	624	0,576

Torsionswinkel normal: 3,2° (bei TK-N)
 Torsionswinkel max: 5° (bei TK-M)
 Zulässiger Temperaturbereich: von - 40° bis +125°

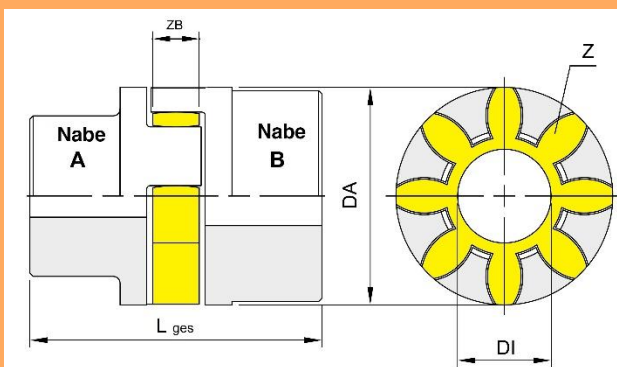

Kupplungsstern aus Polyurethan (Farbe rot) – 98 Shore A

Artikel- Nummer	Größe	Außen DA	Innen DI	Breite ZB	Anzahl "Zähne" Z	Lges	Dreh- zahl n max. [1/min.]	Drehmoment [Nm]			Gewicht [kg]
								TK-N	TK-M	TK-W	
								Nenn	max.	Wechsel	
ZKS14/98	14	30	10	10	4	35	19.000	12,5	25	3,3	0,005
ZKS19/98	19	40	18	12	6	66	14.000	17	34	4,4	0,006
ZKS24/98	24	55	27	14	8	78	10.600	60	120	16	0,015
ZKS28/98	28	65	30	15	8	90	8.500	160	320	42	0,027
ZKS38/98	38	80	38	18	8	114	7.100	325	650	85	0,045
ZKS42/98	42	95	46	20	8	126	6.000	450	900	117	0,067
ZKS48/98	48	105	51	21	8	140	5.600	525	1.050	137	0,088
ZKS55/98	55	120	60	22	8	160	4.750	685	1.370	178	0,120
ZKS65/98	65	135	68	26	8	185	4.250	940	1.880	244	0,174
ZKS75/98	75	160	80	30	10	210	3.550	1.920	3.840	499	0,328
ZKS90/98	90	200	100	34	10	245	2.800	3.600	7.200	936	0,576

Torsionswinkel normal: 3,2° (bei TK-N)
 Torsionswinkel max: 5° (bei TK-M)
 Zulässiger Temperaturbereich: von - 40° bis +125°

