




Einfach - Rollenketten nach **Werksnorm**

Artikel-Nr.	DIN ISO + Werksnorm	Teilung	Lichte Weite	Breite Innen-glied	Rollen Ø	Bolzen Ø	Laschen-höhe	Bolzen-länge				Min. Bruch-Kraft	mittlere Bruch-Kraft	
		p	b1	b2	D1	D2	g	G	k	si	sa	[N]	[N]	kg/m
RK081	081-1	12,7	3,3	5,80	7,75	3,66	9,90	10,2	1,5	1,0	1,0	8.000		0,28
RKF83	WN-F83	12,7	4,88	7,10	7,75	3,66	9,90	11,1	1,5	1,0	1,0	8.200		0,32
RKP83V	WN-P83V	12,7	4,88	7,90	7,75	3,68	10,20	13,2	0,9	1,5	1,5		15.500	0,44
RKW415	WN-415	12,7	4,88	7,95	7,75	3,96	11,90	13,1	1,8	1,5	1,5	15.600		0,55
RK083	083-1	12,7	4,88	7,90	7,75	4,09	10,30	12,9	1,5	1,3	1,3	11.600		0,45
RK084	084-1	12,7	4,88	8,80	7,75	4,09	11,10	14,8	1,5	1,8	1,8	15.600		0,51
RKS84V	WN-S84V	12,7	6,4	9,50	7,75	3,97	12,00	15	1,0	1,5	1,5		18.000	0,58
RK085	085-1	12,7	6,25	9,10	7,77	3,58	9,90	14	2,0	1,3	1,3	6.700		0,41
RKL84	WN-L84	12,7	6,4	9,80	8,51	4,45	11,80	15,4	1,0	1,6	1,6		18.000	0,58
RK5814	WN-M104	15,875	6,45	10,10	10,16	5,08	14,70	16,4	2,2	1,7	1,7	23.600		0,51
RK12B1V	WN-12BV	19,05	11,68	16,80	12,07	6,1	16,00	24,5	2,4	2,4	2,4	40.000		1,45
RK34135	WN-229	19,05	13,5	19,50	12,07	6,1	17,00	28,8	3,0	3,0	3,0	35.000		1,61
RK11212		25,4	12,7	19,00	12,70	6,98	20,50	26,2	3,0	2,5	2,5	20.000		1,38
RK11258	WN-305	25,4	12,7	20,50	15,88	8,26	20,50	30,9	2,5	3,6	3,0	50.000		2,37

Einzelteile

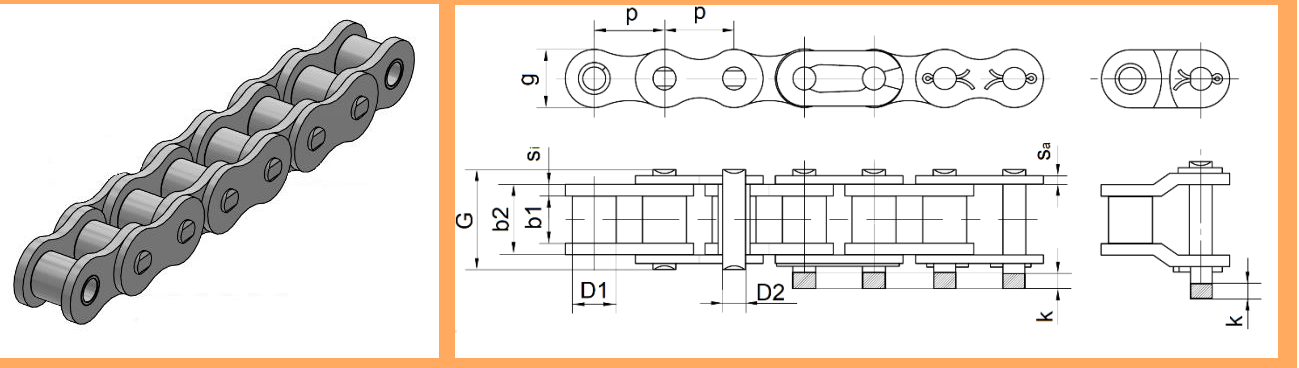