


Mercedesstraße 10  
71334 Waiblingen Hegnach

Telefon: 0 71 51 / 5 24 59  
Telefax: 0 71 51 / 56 35 24

## Keilscheiben für Taper-Spannbuchse

dw = Wirkdurchmesser; b = Kranzbreite

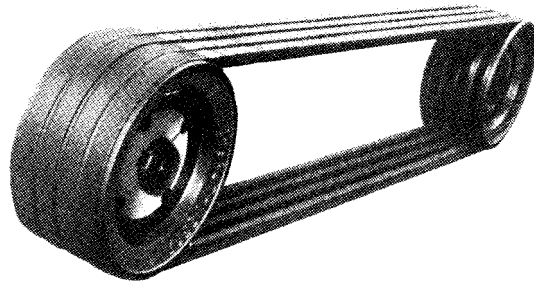

Profile SPZ, XPZ, 10						
Rillen	1	2	3	4	5	6
b	16	28	40	52	64	76
dw	Taper Lock Buchsen Typ					
56	1008	1108				
60	1008	1108				
63	1108	1108	1108			
67	1108	1108	1108			
71	1108	1108	1108			
75	1108	1210	1210			
80	1210	1210	1210	1210		
85	1210	1610	1610	1610	1610	
90	1210	1610	1610	1610	1610	1610
95	1210	1610	1610	1610	1610	1610
100	1210	1610	1610	1610	2012	2012
106	1610	1610	1610	1610	2012	2012
112	1610	1610	2012	2012	2012	2012
118	1610	1610	2012	2012	2012	2517
125	1610	1610	2012	2012	2012	2517
132	1610	1610	2012	2012	2517	2517
140	1610	1610	2012	2012	2517	2517
150	1610	2012	2012	2517	2517	2517
160	1610	2012	2012	2517	2517	2517
180	1610	2012	2012	2517	2517	2517
200	2012	2012	2012	2517	2517	2517
224	2012	2012	2012	2517	2517	2517
250	2012	2012	2012	2517	2517	2517
280	2012	2012	2517	2517	2517	2517
315	2012	2012	2517	2517	2517	2517
355	2012	2012	2517	2517	2517	2517
400	2012	2517	2517	2517	3020	3020
500		2517	2517	3020	3020	3020
630			2517	3020	3020	3525

Profile SPB, XPB, 17								
Rillen	1	2	3	4	5	6	8	10
b	25	44	63	82	101	120	158	196
dw	Taper Lock Buchsen Typ							
112		1610	1610					
118		1610	1610					
125	1610	2012	2012	2012	2012			
132	1610	2012	2012	2012	2517			
140	1610	2012	2012	2517	2517	2517		
150	1610	2012	2517	2517	2517	2517		
160	1610	2012	2517	2517	2517	3020		
170	1610	2012	2517	2517	3020	3020		
180	1610	2517	2517	2517	3020	3020	3020	
190	2012	2517	2517	2517	3020	3020	3020	
200	2012	2517	2517	3020	3020	3020	3525	
212	2012	2517	2517	3020	3020	3525	3525	
224	2012	2517	2517	3020	3020	3525	3525	3535
236	2012	2517	2517	3020	3525	3525	3525	3535
250	2012	2517	3020	3020	3525	3525	3525	3535
280		2517	3020	3020	3525	3525	3525	3535
315		2517	3020	3525	3525	3525	3525	3535
355		3020	3020	3525	3525	3525	3525	4040
400		3020	3525	3525	3525	3525	3525	4040
450		3020	3525	3525	3525	3525	3525	4545
500		3020	3525	3525	3525	3525	3525	4545
560		3020	3525	3525	3525	3525	4030	4545
630		3020	3525	3525	3525	3525	4030	4545
710			3525	3525	4030	4535	4535	4545
800			3525	4030	4030	4535	4535	4545
900			3525	4030	4535	4535	4535	5050
1000			4030	4030	4535	4535	4535	5050

Profile SPA, XPA, 13						
Rillen	1	2	3	4	5	6
b	20	35	50	65	80	95
dw	Taper Lock Buchsen Typ					
80	1210	1210	1210			
85	1210	1210	1210			
90	1210	1610	1610	1610		
95	1210	1610	1610	1610		
100	1610	1610	1610	1610	1610	1610
106	1610	1610	1610	2012	2012	2012
112	1610	1610	2012	2012	2012	2012
118	1610	1610	2012	2012	2012	2012
125	1610	1610	2012	2012	2012	2012
132	1610	2012	2012	2517	2517	2517
140	1610	2012	2517	2517	2517	2517
150	1610	2012	2517	2517	2517	2517
160	1610	2012	2517	2517	2517	2517
180	1610	2012	2517	2517	3020	3020
200	2012	2517	2517	3020	3020	3020
224	2012	2517	2517	3020	3020	3020
250	2012	2517	2517	3020	3020	3020
280	2012	2517	2517	3020	3525	3525
315	2012	2517	3020	3020	3525	3525
355	2012	2517	3020	3020	3525	3525
400	2012	2517	3020	3020	3525	3525
450		2517	3020	3020	3525	3525
500		2517	3020	3020	3525	3525
560		3020	3020	3525	3525	3525
630		3020	3020	3525	3525	4030
800			3525	3525	4030	4030

Profile SPC, XPC, 22						
Rillen	3	4	5	6	8	10
b	85	111	136	162	213	264
dw	Taper Lock Buchsen Typ					
200	2517	3020	3525	3525	3525	
212	3020	3020	3525	3525	3525	
224	3020	3525	3525	3525	3525	
236	3020	3525	3525	3525	3525	
250	3020	3525	3525	3525	3525	4040
265	3525	3525	3525	3525	3525	
280	3525	3525	3525	3525	3525	4040
300	3525	3525	3525	3525	3525	4045
315	3525	3525	3525	3525	3525	4545
335	3525	3525	3525	3525	3525	
355	3525	3525	3525	3525	3525	4545
375	3525	3525	3525	3525	4030	4545
400	3525	3525	3525	3525	4030	5050
425	3525	3525	3525	4535	4535	4545
450	3525	3525	3525	4535	4535	5050
475	3525	3525	3525	4535	4535	
500	3525	3525	3525	4535	4535	5050
530	3525	3525	4535	4535	4535	
560	3525	3525	4535	4535	4535	5050
630	4030	4030	4535	4535	4535	5050
800	4535	5040	5040	5040	5040	5050
1000	5040	5040	5040	5040	5040	5050