
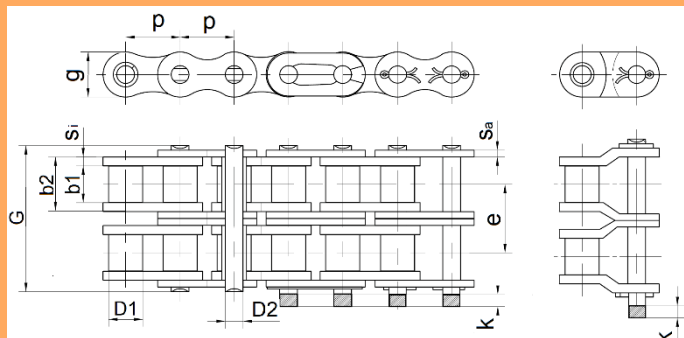


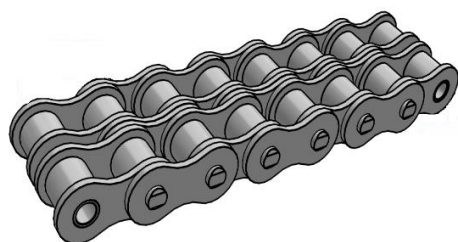


Zweifach - Rollenketten nach DIN 8187 - ISO 606

Europäische Bauart (BS - Standard)


Artikel-Nr.	DIN ISO	Teilung p	Lichte Weite b1	Breite Innen-glied b2	Rollen Ø D1	Bolzen Ø D2	Laschen-höhe g	Bolzen-länge G	k	si	sa	e	Min. Bruch-Kraft [N]	mittlere Bruch-Kraft [N]	kg/m
DRK05B2	05B-2	8	3	4,77	5,00	2,31	7,1	14,3	3,1	0,8	0,8	5,64	7.800	10.200	0,33
DRK06B2*	06B-2	9,525	5,72	8,53	6,35	3,28	8,2	23,8	3,3	1,3	1,3	10,24	16.900	18.100	0,77
DRK08B2	08B-2	12,7	7,75	11,30	8,51	4,45	11,8	31	3,9	1,6	1,6	13,92	31.100	37.400	1,34
DRK10B2	10B-2	15,875	9,65	13,28	10,16	5,08	14,7	36,2	4,1	1,7	1,7	16,59	44.500	54.200	1,84
DRK12B2	12B-2	19,05	11,68	15,62	12,07	5,72	16	42,2	4,6	1,9	1,9	19,46	57.800	66.600	2,31
DRK16B2	16B-2	25,4	17,02	25,40	15,88	8,28	21	68	5,4	4	3	31,88	106.000	126.500	5,42
DRK20B2	20B-2	31,75	19,56	29,00	19,05	10,19	26,4	79,7	6,1	4,5	3,5	36,45	170.000	210.000	7,20
DRK24B2	24B-2	38,1	25,4	37,90	25,40	14,63	33,2	101,8	6,6	6	5	48,36	280.000	305.500	13,40
DRK28B2	28B-2	44,45	30,99	46,50	27,94	15,9	36,7	124,7	7,4	7,5	6	59,56	360.000	390.500	16,60
DRK32B2	32B-2	50,8	30,99	45,50	29,21	17,81	42,2	126	7,9	7	6	58,55	450.000	487.500	21,00
DRK40B2	40B-2	63,5	38,1	55,70	39,37	22,89	52,9	154,9	10	8,5	8	72,29	630.000	680.200	32,00
DRK48B2	48B-2	76,2	45,72	70,50	48,26	29,24	63,8	190,4	11	12	10	91,21	1.000.000	1.070.000	50,00

* mit geraden Laschen


Einzelteile




Innenglied




Verbindungsglied
mit Feder




Verbindungsglied
mit Splint



gekröpftes Glied
mit Splint



gekröpftes Doppelglied



Nietaußenglied