

Scharnierband-Ketten

geradgängig / Einfach-Scharnier / Stahl / p= 38,1 mm		K	h	f	b	B
TYP						
Vergüt.-Stahl	Rostfrei					
	SSR810-K125	32,0	3,15	9,8	22,0	24,0
	SSR810-K175	44,5	3,15	9,8	22,0	24,0
	SSC812-K300	76,2	3,15	9,8	42,1	44,0
S815-K325	SSC812-K325	82,5	3,15	9,8	42,1	44,0
S815-K350	SSC812-K350	88,9	3,15	9,8	42,1	44,0
S815-K400	SSC812-K400	101,6	3,15	9,8	42,1	44,0
S815-K450	SSC812-K450	114,3	3,15	9,8	42,1	44,0
S815-K600	SSC812-K600	152,4	3,15	9,8	42,1	44,0
S815-K750	SSC815-K750	190,5	3,15	9,8	42,1	44,0

geradgängig / Doppel-Scharnier / Stahl / p=38,1		K	h	f	b	B
SC800-K750	SSC802-K750	190,5	3,15	9,8	80,5	82,5

geradgängig / Einfach-Scharnier / Kunststoff / p=38,1		K	h	f	b	B
TYP						
Acetal (grau)	LF* (braun)					
D820-K325	LF820-K325	82,5	4,0	9,5	42,1	44,5
D820-K350	LF820-K350	88,9	4,0	9,5	42,1	44,5
D820-K400	LF820-K400	101,6	4,0	9,5	42,1	44,5
D820-K450	LF820-K450	114,3	4,0	9,5	42,1	44,5
D820-K600	LF820-K600	152,4	4,0	9,5	42,1	44,5
D820-K750	LF820-K750	190,5	4,0	9,5	42,1	44,5

*mit Teflon-Zusatz





kurvgängig / mit Tab-Führung / Stahl rostfrei / p=38,1										
TYP	K	h	b	B Gerade	B Kurve	m	g	G	R	
SSC8811TAB-K325	82,5	3,15	43,0	46,0	44,2	56,2	12,7	16,3	457	
SSC8811TAB-K450	114,3	3,15	43,0	46,0	44,2	56,2	12,7	16,3	610	
SSC8811TAB-K750	190,5	3,15	43,0	46,0	44,2	56,2	12,7	16,3	610	

kurvgängig / mit Tab-Führung / Kunststoff (braun) / p=38,1										
TYP	K	h	b	B Gerade	B Kurve	m	g	G	R	
LF880TAB-K325	82,5	4,0	42,9	46,0	44,2	61,1	11,5	16,0	457	
LF880TAB-K450	114,3	4,0	42,9	46,0	44,2	61,1	11,5	16,0	500	
LF882TAB-K450	114,3	4,8	57,2	60,0	58,0	76,2	17,0	22,2	610	
LF882TAB-K750	190,5	4,8	57,2	60,0	58,0	76,2	17,0	22,2	610	
LF882TAB-K1000	254,0	4,8	57,2	60,0	58,0	76,2	17,0	22,2	610	

kurvgängig / mit Schrägführung / Stahl rostfrei / p=38,1							
TYP	K	h	b	B Gerade	B Kurve	g	R
SSC8811SF-K325	82,5	3,15	43,0	44,5	41,4	11,2	457
SSC8811SF-K450	114,3	3,15	43,0	44,5	41,4	11,2	610
SSC8811SF-K750	190,5	3,15	43,0	44,5	41,4	11,2	610

kurvgängig / mit Schrägführung / Kunststoff (braun) / p=38,1							
TYP	K	h	b	B Gerade	B Kurve	g	R
LF880SF-K325	82,5	4,0	42,9	44,5	41,4	16,0	457
LF880SF-K450	114,3	4,0	42,9	44,5	41,4	16,0	500
LF882SF-K450	114,3	4,8	61,1	61,9	58,0	17,5	610
LF882SF-K750	190,5	4,8	61,1	61,9	58,0	17,5	610
LF882SF-K1000	254,0	4,8	61,1	61,9	58,0	17,5	610

Maße in mm

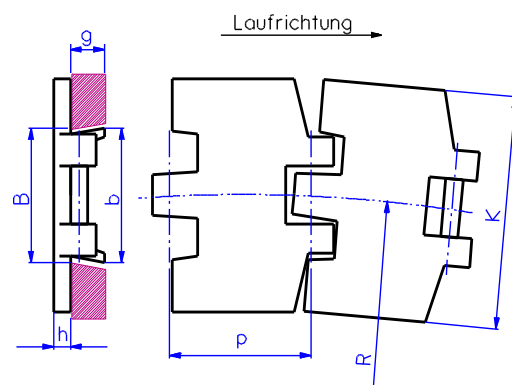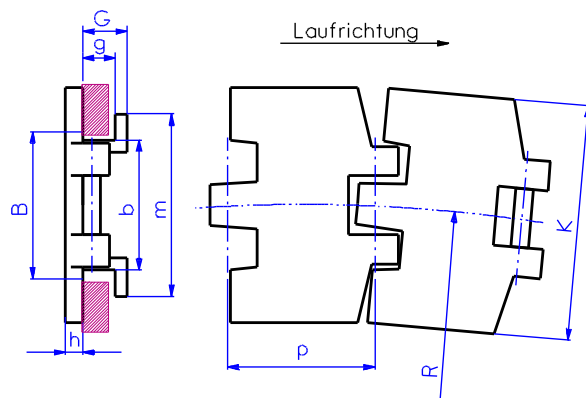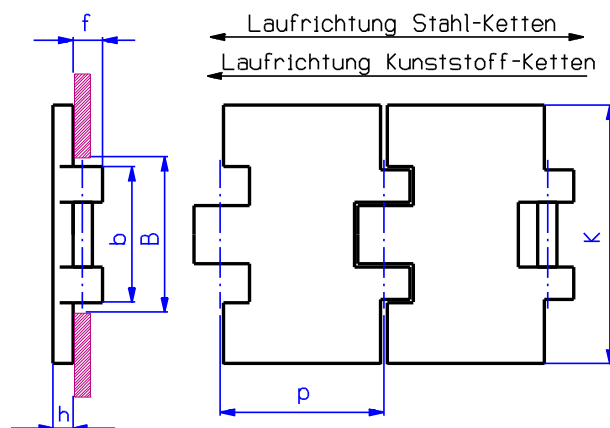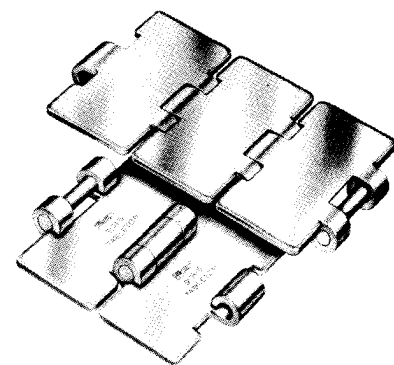

außerdem im Lieferprogramm:

Antriebs- und Umlenkräder, siehe



Gleitschienen für Scharnierbandketten, siehe

