


Kettenrad mit Nabe 05B (8 x 3 mm)

Für Rollenketten nach DIN 8187

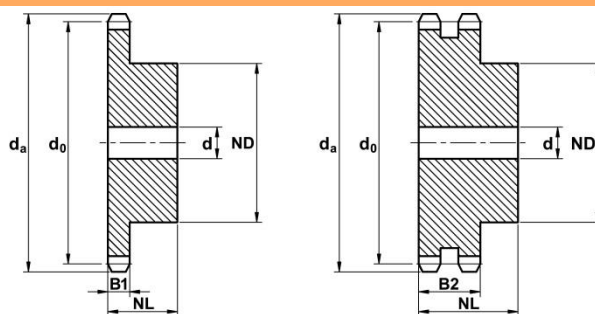

Zahnbreite B1 : 2,8

Zahnbreite B2 : 8,3

Z	da	d0	einfach					Zweifach					dreifach				
			Artikel-Nr.	ND	d	NL	kg	Artikel-Nr.	ND	D	NL	kg	Artikel-Nr.	ND	d	NL	kg
8	24,0	20,90	R1B05Z008	13	6	12	0,01	R2B05Z008	12	8	18	0,03					
9	26,6	23,39	R1B05Z009	15	6	12	0,02	R2B05Z009	15	8	18	0,04					
10	29,2	25,89	R1B05Z010	17	6	12	0,02	R2B05Z010	17	8	18	0,04					
11	31,7	28,39	R1B05Z011	18	7	13	0,03	R2B05Z011	19	8	18	0,05					
12	34,2	30,91	R1B05Z012	20	7	13	0,03	R2B05Z012	21	8	18	0,06					
13	36,7	33,42	R1B05Z013	23	7	13	0,04	R2B05Z013	24	8	18	0,08					
14	39,2	35,95	R1B05Z014	25	7	13	0,05	R2B05Z014	26	8	18	0,09					
15	41,7	38,48	R1B05Z015	28	7	13	0,07	R2B05Z015	29	8	18	0,11					
16	44,3	41,01	R1B05Z016	30	8	14	0,08	R2B05Z016	32	10	20	0,14					
17	46,8	43,53	R1B05Z017	30	8	14	0,09	R2B05Z017	34	10	20	0,15					
18	49,3	46,07	R1B05Z018	30	8	14	0,09	R2B05Z018	37	10	20	0,18					
19	51,9	48,61	R1B05Z019	30	8	14	0,09	R2B05Z019	39	10	20	0,20					
20	54,4	51,14	R1B05Z020	30	8	14	0,10	R2B05Z020	40	10	20	0,22					
21	57,0	53,68	R1B05Z021	35	8	14	0,13	R2B05Z021	45	12	20	0,23					
22	59,5	56,21	R1B05Z022	35	8	14	0,13	R2B05Z022	45	12	20	0,24					
23	62,0	58,75	R1B05Z023	35	8	14	0,13	R2B05Z023	45	12	20	0,25					
24	64,6	61,29	R1B05Z024	35	8	14	0,13	R2B05Z024	45	12	20	0,27					
25	67,5	63,83	R1B05Z025	35	8	14	0,15	R2B05Z025	45	12	20	0,28					
26	69,5	66,37	R1B05Z026	40	10	16	0,18	R2B05Z026	50	12	22	0,39					
27	72,2	68,91	R1B05Z027	40	10	16	0,19	R2B05Z027	50	12	22	0,40					
28	74,8	71,45	R1B05Z028	40	10	16	0,20	R2B05Z028	50	12	22	0,42					
29	77,3	73,99	R1B05Z029	40	10	16	0,21	R2B05Z029	50	12	22	0,44					
30	79,8	76,53	R1B05Z030	40	10	16	0,21	R2B05Z030	50	12	22	0,45					
31	82,4	79,08	R1B05Z031	40	12	16	0,21	R2B05Z031	60	12	22	0,57					
32	84,9	81,61	R1B05Z032	40	12	16	0,22	R2B05Z032	60	12	22	0,59					
33	87,5	84,16	R1B05Z033	40	12	16	0,23	R2B05Z033	60	12	22	0,61					
34	90,0	86,70	R1B05Z034	40	12	16	0,23	R2B05Z034	60	12	22	0,63					
35	92,5	89,25	R1B05Z035	40	12	16	0,24	R2B05Z035	60	12	22	0,65					
36	95,0	91,79	R1B05Z036	40	12	16	0,26	R2B05Z036	60	12	22	0,67					
37	97,6	94,33	R1B05Z037	40	12	16	0,26	R2B05Z037	60	12	22	0,69					
38	100,2	96,88	R1B05Z038	40	12	16	0,27	R2B05Z038	60	12	22	0,71					
39	102,7	99,42	R1B05Z039	40	12	16	0,28	R2B05Z039	60	12	22	0,74					
40	105,3	101,97	R1B05Z040	40	12	16	0,30	R2B05Z040	60	12	22	0,76					
45	118,0	114,69	R1B05Z045	60	12	20	0,51										
48	125,5	122,32	R1B05Z048	62*	12	20	0,67										
50	130,7	127,41	R1B05Z050	62*	12	20	0,62										
57	148,6	145,22	R1B05Z057	80*	14	20	0,97										
60	156,0	152,85	R1B05Z060	80*	16	34	1,53										
76	196,7	193,59	R1B05Z076	80*	20	34	1,94										

Material: C45 / * St - Nabe geschweißt