




Gleitschienen

Werkstoff PE grün, ohne Stahl-C-Profil


TU-Profil

Artikel-Nr.	Ketten- bezeichnung	DIN/ISO	Abmessungen in mm			
			B	H	b	h
GLTU	z.B.: 1/2"x3/16"	z.B.: 083-1	15	10	12	2,2

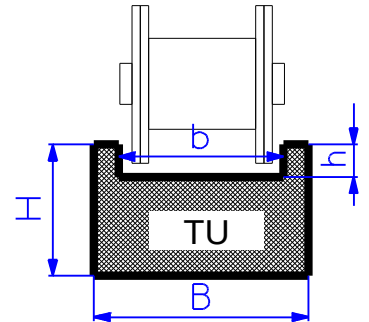


T-Profil

Artikel-Nr.	Ketten- bezeichnung	DIN/ISO	Abmessungen in mm			
			B	H	b	h
GLT06B1x15x10	3/8" x 7/32"	06 B-1	15	10	5,4	1,5
GLT12316	1/2" x 3/16"	083-1, 084-1	15	10	4,5	1,5
GLT1214	1/2" x 1/4"	085-1	20	10	6,2	2,2
GLT08B1x20x10	1/2" x 5/16"	08 B-1	20	10	7,4	2,2
GLT08B1x20x15			15			
GLT08B1x20x20			20			
GLT5814	5/8" x 1/4"	-	20	10	6,2	2,6
GLT10B1x20x10	5/8" x 3/8"	10 B-1	20	10	9,3	2,6
GLT10B1x20x15			15			
GLT10B1x20x20			20			
GLT12B1x25x10	3/4" x 7/16"	12 B-1	25	10	11,3	2,4
GLT12B1x25x15			15			
GLT12B1x25x20			20			
GLT16B1x40x15	1" x 17 mm	16 B-1	40	15	16,0	3,5
GLT16B1x40x20	1" x 17 mm	16 B-1	40	20		
GLT20B1x45x15	1 1/4" x 3/4"	20 B-1	45	15	18,0	4,2

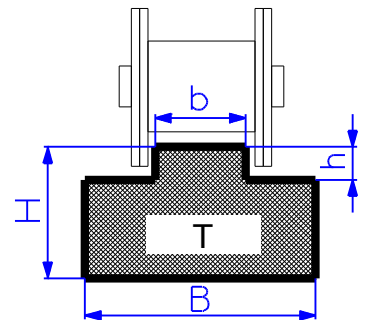


T-Profil-duplex

Artikel-Nr.	Ketten- bezeichnung	DIN/ISO	Abmessungen in mm			
			B	H	b	h
GLT06B2x25x10	3/8" x 7/32"	06 B-2	25	10	5,4	1,5
GLT08B2x35x10	1/2" x 5/16"	08 B-2	35	10	7,4	2,2
GLT08B2x35x15			15			
GLT08B2x35x20			20			
GLT10B2x40x10	5/8" x 3/8"	10 B-2	40	10	9,3	2,6
GLT12B2x45x15	3/4" x 7/16"	12 B-2	45	15	11,3	2,4
GLT16B2x48x15	1" x 17 mm	16 B-2	48	15	16	3,5




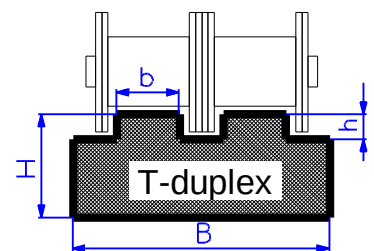


U-Profil

Artikel-Nr.	Ketten- bezeichnung	DIN/ISO	Abmessungen in mm			
			B	H	b	h
GLU06B1	3/8" x 7/32"	06 B-1	20	15	9,4	2,8
GLU12316	1/2" x 3/16"	083-1	20	15	10,8	2,3
GLU1214	1/2" x 1/4"	085-1	20	15	11,8	3,2
GLU1214851	1/2"x1/4"xØ8,51	-	20	15	12,8	3,5
GLU08B1	1/2" x 5/16"	08 B-1	25	15	12,8	3,5
GLU5814	5/8" x 1/4"	-	25	15	15,4	3,6
GLU10B1	5/8" x 3/8"	10 B-1	25	15	15,4	3,6
GLU12B1	3/4" x 7/16"	12 B-1	25	20	17,0	3,9
GLU16B1	1" x 17 mm	16 B-1	35	25	24,0	8,4

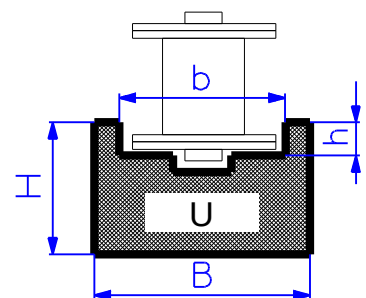

Profil-Bänder

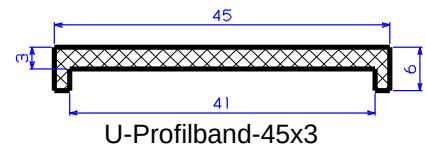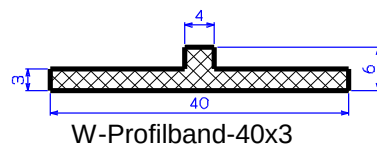

außerdem lieferbar:

- Flachbänder in Dicken von 3, 4, 5 mm in verschiedenen Breiten
- Flachstäbe, z.B. Querschnitt 40x10, 40x20, 60x10, 70x10
- Rundstäbe, z.B. mit Ø20, Ø30, Ø40, Ø60, Ø80
- Führungen für Keil- und Flachriemen sowie für Rundgliederketten